


## NORMAQUICK® PS3



### Secure connection for cooling water and heating hoses

- ✓ Time and cost reduction due to snap assembly without tool
- ✓ Application in extremely narrow spaces thanks to compact dimensions
- ✓ Optimal tightness through integrated seal
- ✓ Resistance to coolant medium thanks to O-ring consisting of peroxide cured EPDM

**NORMAQUICK® PS3**

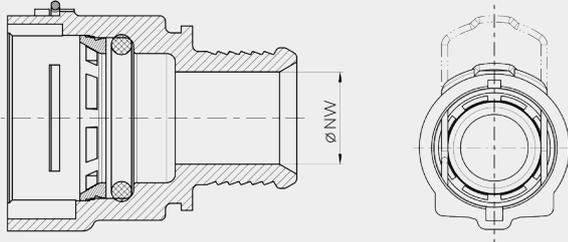

**Applications**

PS3 connectors are used for leak proof connection of cooling water lines or heating lines in automotive and industrial applications.

**Material**

Housing	PA66-GF30
O-ring	EPDM (peroxide cured)
Fastening ring	PA66-GF30
Retainer (spring)	Stainless steel 1.4310 (DIN EN 10270-3)

Description	Ø NW* (mm)	Part number	Packaging quantity (pcs)
PS3 NW06 - 0°	6	0702 8003 006	50
PS3 NW06 - 90°	6	0702 8008 006	100
PS3 NW08 - 0°	8	0702 7002 008	100
PS3 NW08 - 90°	8	0702 7703 008	100
PS3 NW12 - 0°	12	0702 6009 012	100
PS3 NW12 - 90°	12	0702 6008 012	100
PS3 NW16 - 0°	16	0702 7019 016	100
PS3 NW16 - 90°	16	0702 6020 016	100
PS3 NW20 - 0°	20	0702 7003 020	100
PS3 NW20 - 90°	20	0702 7004 020	100
PS3 NW26 - 0°	26	0702 6007 026	100
PS3 NW26 - 90°	26	0702 7011 026	100
PS3 NW32 - 0°	32	0702 7018 032	50
PS3 NW32 - 90°	32	0702 7042 032	50

\*NW (Nominal Width): Diameter of the connecting spigot

**Technical benefits**

- ✓ Designed to be mounted on standard spigot design as per VDA guideline
- ✓ PA66 (GF30 housing and retainer) stabilized against heat and hydrolysis effect for direct contact with coolant guideline
- ✓ Made from recyclable materials

**NORMAQUICK® PS3 is part of a broad portfolio. Discover more!**



NORMAQUICK® S



NORMAQUICK® V2



**Do you have questions or require a personal consultation?**  
 Feel free to contact our NORMA Team! Tel.: +49 6181 403-0  
 Visit our website for more information about our products: [norma-connects.com](http://norma-connects.com)